


1-800-239-1434

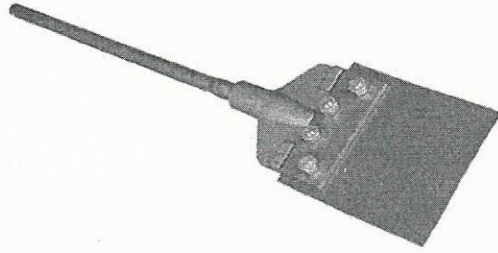

Tips for using the Floor Scraper

Check the tightness of the nuts routinely.

- *Although we have superior hardware, the constant vibration will loosen the nuts.
- *We recommend checking the bolts after each rental.
- *If a customer is going to be using the tool for long durations during the day, they will need to periodically check the nuts and bolts.

Prying will bend the blade. The tool is designed to scrape material - not pry it up.

- ~~*Damage can result to the hammer if the tool is used for prying.~~
- *When prying occurs, the side load on the tool can cause material failure.

Educate customers on the correct angle of attack for the tool.

- *No higher than a 45° angle. Any higher and the tool can destroy itself.
- *If the hammer is raised too high, the shank can be driven through the head.
- *The customer will have to put pressure on the hammer to drive the scraper forward.

Recommended Applications

- | | | |
|----------------|---------------|-------------------|
| ■ Ceramic Tile | ■ Vinyl Floor | ■ Tile Adhesive |
| ■ Mastic | ■ Epoxy Floor | ■ Carpet Adhesive |
| ■ Thinset | ■ VCT | |

www.ChampionChisel.com